




# Wyndmaster 3210

## Multi- Spindle Automatic Take-Up System

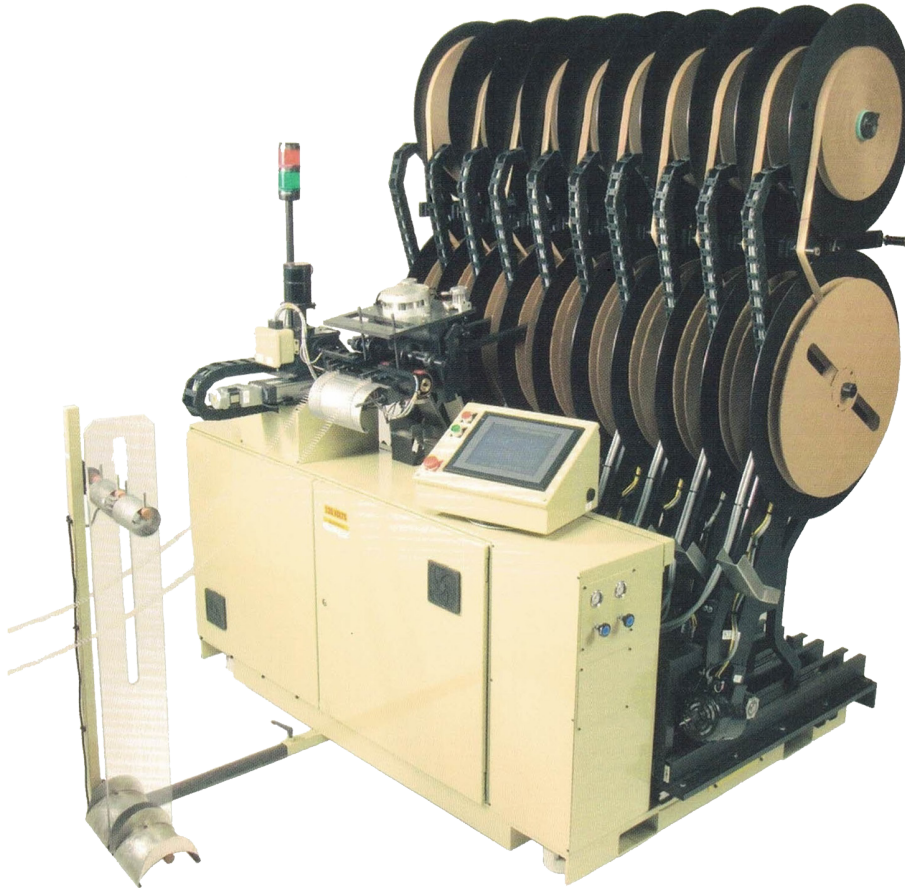

### FEATURES

- Single Strip Operation
- Ten Reel Capacity
- Automatic Reel Transfer
- Selectable Overwind / Underwind Operation
- Non-Contact PC Loop Control
- Tangential Product Feeder
- Sample Strip with Programmable Cut Location
- Operator Start Paper Interleaf with
- Programmable Tensioning

### OPTIONS

- Dual Strip Configuration for Two-Out Dies
- Integrated Vision Inspection System
- Dancer Loop Control
- Ultrasonic Loop Control
- Accumulator
- Material Component Selection for Corrosive Environments



**Customized Products  
For Any Applications!**

[jcrautomation.com](http://jcrautomation.com)

**JCR Automation**  
1426 Ryan Rd  
New Haven, IN 46774  
Phone: 260-493-6606





# Wyndmaster 3210

## Specifications

### POWER REQUIREMENTS

120 VAC, single phase, 20 A

### AIR SUPPLY

80 PSI

### MATERIAL WIDTH (MAX)

2 Inches

### SPINDLE DIAMETER

(Per Customers request)

### FEED RATE CAPABILITY

6501 IPM without accumulator

### Reel Diameter (Max):

36 inches with 18 inch paper diameter

30 inches with 24 inch paper diameter

(others available upon request)

### FEED DIRECTION




Left to right or right to left (Per Customer Requirements)

### SPINDLE MOTORS

80 RPM, 1/4 HP AC (Standard/others available upon request)

### REEL CENTER CORE

5.0 inches (Standard/others available upon request)

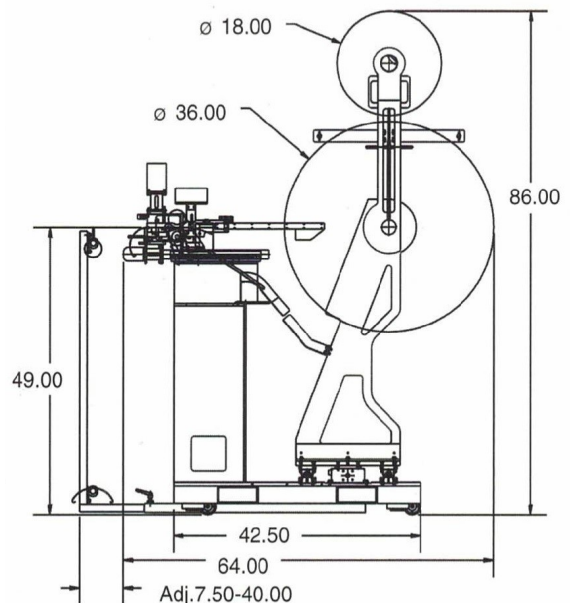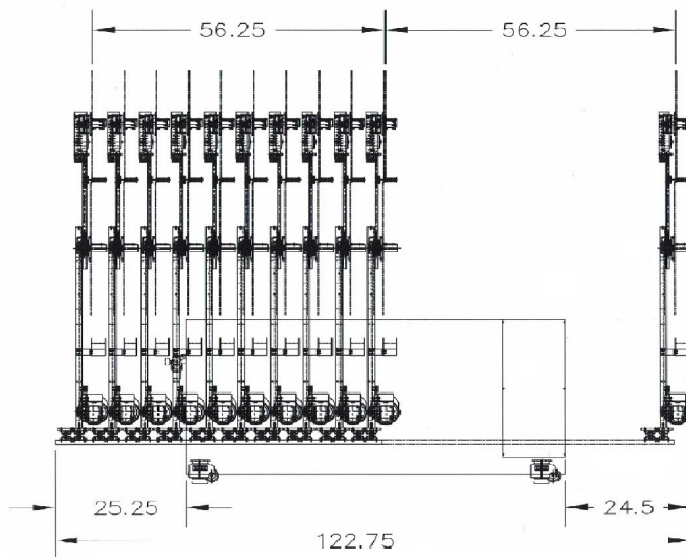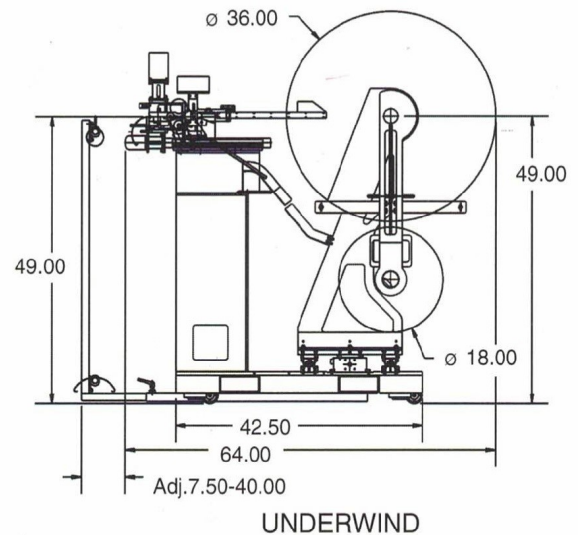

Customized Products  
For Any Applications!

[jcrautomation.com](http://jcrautomation.com)

JCR Automation  
1426 Ryan Rd  
New Haven, IN 46774  
Phone: 260-493-6606

